


# PAVY

## Universal Remote

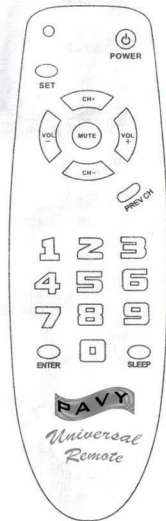

### INSTRUCTION MANUAL

Please save for future reference

### INTRODUCTION

Thank you for your purchase of the 330015 Universal Remote Control.

This remote allows you to replace a lost or broken TV remote.

This remote control operates common features of most models and brands of IR infrared controlled televisions.

In order to maintain compatibility with the greatest number of original remotes, certain functions present on your original remote may not be available with the 330015.

Please use this manual to become familiar with the operations of the 330015. It is recommended that you save this manual for future reference or for re-programming remote to work with a different device.


### BATTERY INSTALLATION

Your 330015 universal remote requires two new AAA alkaline batteries to operate. To install batteries:

1. Remove screw from battery cover on back of remote. Push down on tab and lift cover off.
2. Match the batteries to the "+" and "-" marks inside the battery case and insert batteries.
3. Press battery cover back into place and replace screw.

**Battery Saver**-Your remote will automatically "time out" if keys are depressed for more than two minutes. This will save your batteries should your remote get stuck in a place where the keys remain depressed (e.g., between the sofa cushions, etc.)

**Code Saver**-You will have 90 seconds to change the batteries in the remote without losing the codes you have programmed. However, do not press any keys while changing batteries. If any button is pressed without batteries in the remote, all codes will be lost.

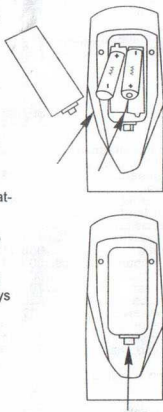

### BUTTON FUNCTIONS

Some buttons on your remote control may have functions that are referred to by different names on the original device. For example, "PREV CH" may be called "Flashback" or "ENTER" may be called "Display". These differences depend on the brand and model of your product. Also, this remote can only operate features that exist on your device. For example, your TV must be equipped with Previous Channel function for the "PREV CH" button to operate this feature.

#### INDICATOR LIGHT

Lights when any button is pressed

#### SET

Used when programming remote

**CHANNEL +/-**  
Changes TV channels.

#### NUMBERS

Enter numbers for direct channel selection. Some TVs require "ENTER" to be pressed after channel selection.

#### ENTER

Shows TV's Channel/Time display. Also used after entering channel number to immediately tune to selected channel.

#### POWER

Turns device On or Off

#### MUTE

Turns off TV sound.

**VOLUME +/-**  
Changes TV volume.

**PREV CH**  
Returns TV to previously selected channel.

#### SLEEP

Activates Sleep Timer (if available)

### PROGRAMMING YOUR REMOTE

#### Using the Code Library

1. Manually turn on the TV.

2. Press and hold the "SET" button until the Indicator Light stays lit, then release "SET" button.

3. Find the three digit code for your brand of TV in the Code List (see back of these instructions). Enter the code using the Number keys. After your code is entered, the Indicator Light will turn off. Note: If the Indicator Light blinked rapidly when you entered the code, you may have entered an invalid code. Recheck the code list and try again.

4. With your TV turned on, press Channel Up button. If the TV responds, no further programming is required. Note: If some buttons do not function correctly with your equipment, try one of the other codes listed for your brand.

5. Enter your code here for future reference.

#### Using the Auto Search function

If the code for your TV is not listed, try the following to find the code for your device.

1. Manually turn on the TV.

2. Press and hold the "SET" button until the Indicator Light stays lit, then release "SET" button.

3. Press and release the "POWER" button until the device shuts off.

4. Press ENTER to complete setup and lock in your code.

5. After programming your code with the Auto Search function, identify your code number using the Code Identification instructions shown below, and write your code below for future reference.

#### Code Identification Instructions

1. Press and hold the "SET" button until the Indicator Light stays lit, then release "SET" button.

2. Press and release "SET" button again. Indicator Light will blink once to indicate ready.

3. To find the first digit, press the Number keys from 0 to 9. When the Indicator Light blinks once, this is the first digit of the code. Repeat to find second and third digits. After third digit is found, Indicator Light will remain off. Write your code below for future reference.

|  |  |  |
|--|--|--|
|  |  |  |
|--|--|--|

## TV REMOTE CODE LIST

|                                     |                                     |                                     |                                      |                                     |                                     |                                     |                                     |
|-------------------------------------|-------------------------------------|-------------------------------------|--------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| Abex.....                           | 120                                 | Electrohome.....                    | 002.502.024.901.803.027              | Memorex.....                        | 002.502.506.706.115.704.601.428.632 | Sansui.....                         | 115.632                             |
| Admiral.....                        | 603.224.701                         | Elite video.....                    | 32                                   | 701                                 | 704.601.701                         | Santeca.....                        | 021                                 |
| Advent.....                         | 219.893                             | Emerson.....                        | 002.502.006.115.506.706.520.906.316  | Mga.....                            | 002.102.502.706.802.803.715.619     | Sanyo.....                          | 506.311.612.002.428.802.412.619     |
| Adventura.....                      | 019                                 | 614.605.324.924.626.826.024.327.128 | 228.632.134.247.605.705.805.703.903  | Midland.....                        | 704.713.007.312.103                 | Scotch.....                         | 002.502                             |
| Aiko.....                           | 407                                 | 004.519.106.104.304.604.804.005.105 | 305                                  | Minutz.....                         | 806                                 | Scott.....                          | 002.502.706.906.004.105.805         |
| Alwa.....                           | 121.221.324.528                     | Envision.....                       | 002.502.009.027                      | Mitsubishi.....                     | 102.716.706.002.502.024.803.715.619 | Sears.....                          | 704.807.506.706.112.002.502.312.512 |
| Alleron.....                        | 706                                 | Fisher.....                         | 506.612.428.619.802                  | 207                                 | 207                                 | 612.520.801.812.509.041.247.802.103 |                                     |
| Amark.....                          | 603                                 | Fujitsu.....                        | 321.706                              | Monivision.....                     | 205                                 | 619                                 |                                     |
| Amtron.....                         | 906                                 | Funai.....                          | 706.520.906.324.247.805              | Montgomery.ward.....                | 704.601.701                         | Selectron.....                      | 101.069.079                         |
| Akai.....                           | 112.801.309.024                     | Futuretec.....                      | 906.805                              | Moteva.....                         | 506                                 | Sharp.....                          | 509.913.907.603.002.502.224.228.202 |
| Anam.national.....                  | 906.901.104.805.920                 | Gateway.....                        | 206                                  | Motorola.....                       | 603.901                             | 111.813                             |                                     |
| Aoc.....                            | 002.102.502.003.217.119.320         | Ge.....                             | 704.312.018.002.502.006.007.601.835  | Mtc.....                            | 002.102.502.112.512.003             | Shogun.....                         | 002                                 |
| Apex.....                           | 023.223.123.741                     | 901.114.103.803.806.310             | 901.114.103.803.806.310              | Multitech.....                      | 906                                 | Signature.....                      | 704.601.701.903                     |
| Archel.....                         | 603                                 | Gibriter.....                       | 713.002                              | Multivision.....                    | 010                                 | Simpson.....                        | 402                                 |
| Audiovox.....                       | 906                                 | Goldstar.....                       | 002.205.102.324.435.802.307.609.217  | Myron&davis.....                    | 822                                 | Sonic.....                          | 003                                 |
| Axion.....                          | 319.793                             | Grundy.....                         | 706.906                              | Nad.....                            | 002.502.512.120                     | Sony.....                           | 414.902.801.708.639                 |
| Bang&olufsen.....                   | 620                                 | Uestvision.....                     | 721                                  | Nec.....                            | 719.002.102.502.901.602.111.715     | Soundesign.....                     | 002.502.706.906.402.805             |
| Belcor.....                         | 002                                 | Haier.....                          | 709.223.323.317                      | Nettv.....                          | 206.014                             | Spectravision.....                  | 921                                 |
| Bill&howell.....                    | 704.506.601.701                     | Hallmark.....                       | 002.502                              | Nexstech.....                       | 113.318                             | Squareview.....                     | 520                                 |
| Berg.....                           | 709.909.711                         | Harvard.....                        | 906                                  | Nikei.....                          | 805                                 | Sss.....                            | 002.906.805                         |
| Bradford.....                       | 906                                 | Hitachi.....                        | 410.507.815.607.808.002.502.710.324  | Nikko.....                          | 002.502.407                         | Starlite.....                       | 906                                 |
| Broksonic.....                      | 316.115.626.327.632.041             | Hisense.....                        | 701.802.707.315.515.715.519          | Norcent.....                        | 223.905.207                         | Starsight.....                      | 008                                 |
| Brokwood.....                       | 002                                 | Ilo.....                            | 421.078.001.116                      | Ntc.....                            | 407                                 | Supra.....                          | 002.809                             |
| Candle.....                         | 002.502.019.402                     | Ima.....                            | 906                                  | Olevia.....                         | 040                                 | Superscan.....                      | 812.509.247                         |
| Capehart.....                       | 119                                 | Infinity.....                       | 807.430                              | Oncommand.....                      | 721                                 | Supersonic.....                     | 096                                 |
| Celera.....                         | 023                                 | Initial.....                        | 078                                  | Onking.....                         | 805                                 | Supremacy.....                      | 019                                 |
| Celebrity.....                      | 801                                 | Insignia.....                       | 911.520.247.504.323.115.914.213.318  | Onwa.....                           | 906.805                             | Supreme.....                        | 801                                 |
| Centros.....                        | 518                                 | Integra.....                        | 719                                  | Optimus.....                        | 618.120.039.739                     | Sva.....                            | 223                                 |
| Centurion.....                      | 502                                 | Inted.....                          | 713                                  | Optoma.....                         | 050                                 | Sylvania.....                       | 807.002.502.115.520.919.324.247.402 |
| Cetronic.....                       | 805                                 | Janeil.....                         | 019                                  | Optonica.....                       | 603.111                             | Symphonic.....                      | 408.109.715.217                     |
| Changhong.....                      | 023.741                             | Jcb.....                            | 801                                  | Orion.....                          | 713.115.105                         | Syntax.....                         | 906.520.324.247.004                 |
| Citizen.....                        | 002.502.906.112.512.115.520.701.402 | Jc.penney.....                      | 704.002.102.502.112.321.512.007.601  | Panasonic.....                      | 718.416.007.618.807.039.739.345.696 | Tandy.....                          | 040                                 |
| 805.407                             |                                     | 310.402.802.103.803.604.806.312     | 002.502.914                          | 901.608                             | 718.416.007.618.807.039.739.345.696 | Tatung.....                         | 603                                 |
| Clairtone.....                      | 003                                 | Jensen.....                         | 002.502.914                          | 807.002.102.502.919.408.109.715.901 | 402                                 | Technics.....                       | 709.421.901                         |
| Classic.....                        | 023.741.805                         | Jvc.....                            | 607.204.321.508.326.993.802.108.308  | Philips.....                        | 807.022.020.422.122.222.322.502.520 | Techwood.....                       | 002.502.007                         |
| Cip.....                            | 006.008                             | Kawasho.....                        | 002.502.801                          | 919.521.621.430.247.901.402.408.109 | 210.310.715                         | Teknika.....                        | 704.002.102.502.706.906.112.512.618 |
| Cip.classic.....                    | 021.011.005.020.002.006             | Kaypani.....                        | 119                                  | Philips-magnavox.....               | 807.022.322.919.224.430             | 601.019.701.402.802.805.407         |                                     |
| Color.voice.....                    | 602                                 | Kec.....                            | 805                                  | Pilot.....                          | 002                                 | Telectapn.....                      | 313                                 |
| Colorlyme.....                      | 002.502.602                         | Kenwood.....                        | 002.502                              | Pioneer.....                        | 120.719.808.002.502.610.519         | Telarent.....                       | 704.601.701                         |
| Concerto.....                       | 002.502                             | Klh.....                            | 023                                  | Piva.....                           | 030                                 | Tera.....                           | 002.220                             |
| Concierge.....                      | 713                                 | Kloss.novabeam.....                 | 408.019                              | Polaroid.....                       | 819.918.914                         | Tevion.....                         | 421                                 |
| Contec.....                         | 906.802.003.805                     | Konka.....                          | 906.702.203.306.208.911.842.942.504. | Portland.....                       | 002.102.502.415.614.407             | Tmk.....                            | 002.502                             |
| Cornea.....                         | 606                                 | Kiv.....                            | 906.003.703.805.608                  | Precision.....                      | 218                                 | Toshiba.....                        | 517.419.512.613.719.112.506.111.618 |
| Craig.....                          | 906.805                             | Lasonic.....                        | 622.496                              | Price.club.....                     | 112                                 | 627.437.041.094.802.111.313.715     |                                     |
| Crosley.....                        | 807                                 | Lg.....                             | 002.606.502.102.324.435.802.307.609  | Prima.....                          | 056.118.213.318                     | Trutech.....                        | 057                                 |
| Crown.....                          | 906.805                             | Liquidvideo.....                    | 319.418.793                          | Princeton.graphics.....             | 603.511                             | Universal.....                      | 806.310                             |
| Curtis.mathes.....                  | 704.112.614.002.502.601.506.512.437 | Lodgenet.....                       | 704.821.701.601                      | Prism.....                          | 007                                 | Victor.....                         | 607                                 |
| 701.103                             |                                     | Loewe.....                          | 722.807                              | Proscan.....                        | 704.312.601.817.917.103             | Vidtech.....                        | 002.102.502                         |
| Ctx.....                            | 603                                 | Logik.....                          | 704.701.601                          | Proview.....                        | 820.002.502.910.119.220             | Viewsonic.....                      | 206.808                             |
| Cxc.....                            | 906.805                             | Luce.....                           | 101                                  | Pulsar.....                         | 017.031                             | Viking.....                         | 019                                 |
| Daewoo.....                         | 614.002.502.611.102.415.905.505.826 | Luxman.....                         | 002.502                              | Quasar.....                         | 718.416.007.618.807.039.739.901.608 | Vizio.....                          | 709                                 |
| 529.609.805.407.303.602.214.403.314 |                                     | Lxi.....                            | 704.002.502.506.807.312.512.601.324  | Radio.shack.....                    | 704.002.406.506.906.618.502.324.835 | Wards.....                          | 704.807.002.102.502.706.601.408.109 |
| 503.615.046.                        |                                     | Magnasonic.....                     | 706                                  | 601.802.705.805.111                 | 601.802.705.805.111                 | 310.111.513.806.701.402.004         |                                     |
| Daytron.....                        | 002.502                             | Magnavox.....                       | 807.002.502.919.224.430.247.402.408  | Rca.....                            | 704.002.406.007.011.611.811.312.514 | 915.013                             |                                     |
| Dell.....                           | 522.404.814                         | 109.715                             | 002.502.919.224.430.247.402.408      | 720.102.502.601.817.917.835.901.103 | 704.002.406.506.906.618.502.324.835 | White.westinghouse.....             | 611.614.415.215.324.529.609.        |
| Diamond.vision.....                 | 622.810.496                         | Majestic.....                       | 704.601.701                          | 803.211.912.114.519.320.420         | 704.002.406.007.011.611.811.312.514 | Yamaha.....                         | 618.002.102.502                     |
| Digistar.....                       | 056.118.413.213.318                 | Marantz.....                        | 807.719.002.502                      | 704.002.406.506.906.618.502.324.601 | 704.002.406.506.906.618.502.324.601 | Zenith.....                         | 713.502.606.409.710.507.714.405.712 |
| Dimensia.....                       | 704.601                             | Medion.....                         | 922.421.417                          | 802.705.805.111                     | 802.705.805.111                     | 015.916.008.002.115.415.224.324.326 |                                     |
| Disney.....                         | 417                                 | Megatron.....                       | 002.502.507                          | Realistic.....                      | 802.705.805.111                     | 826.228.430.632.435.437.903.407.505 |                                     |
| Dukane.....                         | 507.808                             | Mei.....                            | 003                                  | Rhapsody.....                       | 003                                 | 701.126                             |                                     |
| Dumont.....                         | 713.002                             |                                     |                                      | Runco.....                          | 713.719.712                         |                                     |                                     |
| Durabrand.....                      | 520.115.916.024.317.027.447.323     |                                     |                                      | Sampo.....                          | 014.206.002.502.119.802             |                                     |                                     |
| Dynasty.....                        | 805                                 |                                     |                                      | Samsung.....                        | 112.309.209.512.302.502.002.102.110 |                                     |                                     |
| Elektra.....                        | 701                                 |                                     |                                      | 818.895.437.802.103.609.012.212     |                                     |                                     |                                     |
| Electroband.....                    | 801.003                             |                                     |                                      | Samsux.....                         | 502                                 |                                     |                                     |
|                                     |                                     |                                     |                                      | Samtron.....                        | 112                                 |                                     |                                     |